

SPECIFICATION

Electrical Specifications

Nominal Voltage	12.8 VDC
Nominal Capacity	200 Ah
Resistance	< 10mΩ
Efficiency	99%
Self Discharge	≤ 3% per month
Max. Batteries in Parallel or Series	4S4P
Cycle Life	> 4000
Max. Continuous Discharging Current	100 A
Peak Discharging Current	200 A@5 s
Max. Continuous Charging Current	100 A
Recommended Charging Voltage	14 V~14.6 V

Environment Specifications

Discharging Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Charging Temperature	32 °F ~ 131 °F (0 °C ~ 55 °C)
Storage Temperature	-40 °F ~ 140 °F (-40 °C ~ 60 °C)
Operating Temperature	-4 °F ~ 122 °F (-20 °C ~ 50 °C)
Relative Humidity	5% ~ 95%


Other

Certifications	UL1973, FCC, CE, UKCA, Bluetooth SIG
Communication	BLE 5.0
Max. Altitude	13123 ft (4000 m)
Heating Film	Support
Mobile APP	Pylontech Auto

Mechanical Specifications


Dimensions (L × W × H)	18.07 × 7.48 × 8.46 in (459 × 190 × 215 mm)
Weight	Approx. 46.08 lbs (20.9 kg)
Terminal Type	M8 × 1.25 × 14 mm
Terminal Torque	9 ± 1 Nm
Case Material	PC
IP Rating	IP65
Cell Type-chemistry	LiFePO ₄

Dimensions

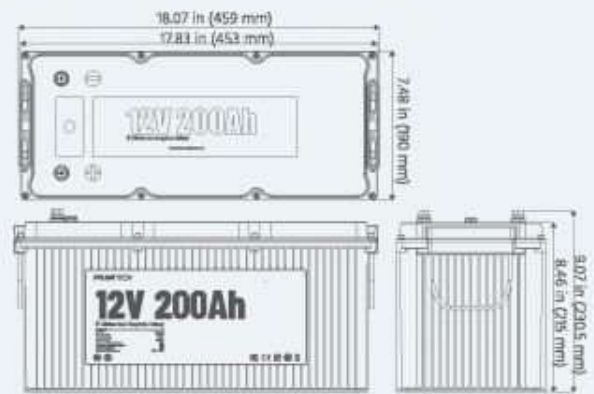


Unit: inch (mm)


Charge at different rates at 77 °F (25 °C)

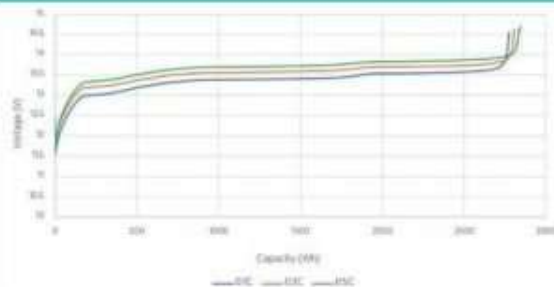


Discharge at different rates at 77 °F (25 °C)

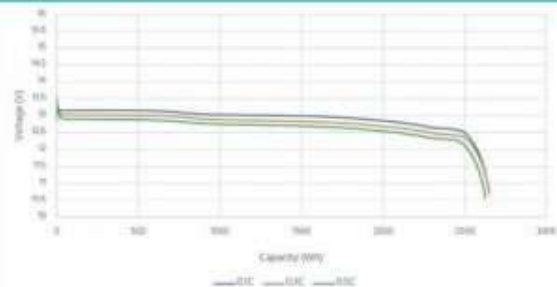

Discharge at different rates at -4 °F (-20 °C)

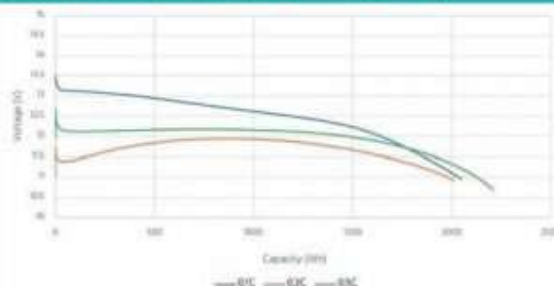

Discharge at different rates at 122 °F (50 °C)

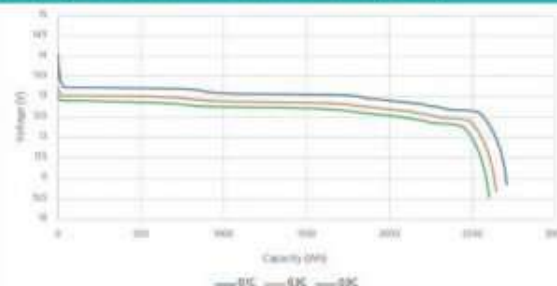

*Product performance is based on testing in a controlled environment. Your results may vary due to several external and environmental factors.

