

# EN54-24 Ceiling Speaker

## DS-EN26FCS

### Features:

- Compliant with the EN54-24 standards fireproof ceiling speaker
- Built-in 100v/70v transformer for PA & VA system
- In-ceiling fast installation type loudspeaker
- 5" full range speaker unit
- Power taps 1.5W/3W/6W @100V
- With metal fire dome for fireproof applications
- Metal grille, ABS baffle and fire dome in red
- Ceramic terminal, thermal fuse, fire dome and fire-resistant cable
- Fast installation by its three spring clips




EN54-24

### Specifications:

Model	DS-EN26FCS
Description	EN54-24 Ceiling Speaker
Power Taps @100V	6W/3W/1.5W
SPL(1W/1M)	91dB
Max. SPL (Rated W/1M)	98dB
Frequency Response	110-14.5KHz (-10dB)
Finish	Metal grille, ABS baffle and fire dome in red
Speaker Driver	5" x 1 full range paper cone
Cutout Size	Ø 140mm
Dimensions	Ø 170 x 90mm
Weight	0.9Kg
Mounting	Spring-clip

### Side View & Dimensions:

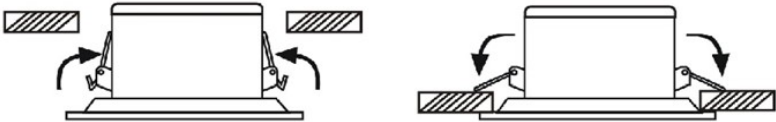

### SPL VS Frequency Diagrams:

