

LL12 12-in-1 Tri-Lens for Color Mixing

Datasheet

For Edixeon® Multi-Color 12-in-1 and Single-Color LEDs

Features:

- High efficiency
- Available in 3 beam Patterns
- Optimized for color mixing effects
- Lens alone



Typical applications :

- Stage Lighting
- Street Lights
- Decorative Light
- Architectural Lighting
- Down Light

Table of Contents

• General Information.....	2
• General Specifications.....	3
• Optical Specifications.....	3
• Mechanical Specifications.....	4
• Illumination charts.....	6
• Package Specifications.....	8
• Product Nomenclature.....	9

General Information

• Compatible Led Type :

The LL12ED-BGxxL Six-lens are optimized for both Multi-Color RGB 12in1 Edixeon® LEDs (EDERTB-1LC6 and EDERTB-1EC1) and Single-Color Edixeon® LEDs from Edison Opto.⁽¹⁾

• Beam Angle Type :

An optimized profile integrate different front shape enable the generation of three different lens models:

Narrow beam (15deg),medium beam (25deg),and wide beam (45deg).⁽²⁾

• Function :

LL12ED-BGxxL provides exceptional color mixing result with the highest efficiency through careful engineering and precision manufacturing process.

Notes:

(1) Edixeon® is a trademark of Edison Opto, for technical information on LEDs, please refer to Edison Opto website at www.edison-opto.com.tw.

(2) Typical beam divergence will be affected by different color of LEDs.

General Specifications

- Lens Material Optical Grade PMMA PC
 - Operating Temperature range -40°C ~ + 70°C (upper limit +80°C)
 - Storage Temperature range -40°C ~ + 70°C (upper limit +80°C)
- *Average transmittance in visible spectrum 400nm~700nm> 90%**

Optical Specifications [Typical beam Angle and intensity (cd/lm) of LL12 lenses]

• EDERTB-1LC6

Part Number	Typical Cone Angle (degree) ⁽³⁾ with EDERTB-1LC6			
	Red LEDs ●	Green LEDs ●	Blue LEDs ●	RGB 3 in 1 ●
LL12ED-BG15L	Efficiency value is under modifying,not at present.			
LL12ED-BG25L	28	27	28	26
LL12ED-BG45L	Efficiency value is under modifying,not at present.			

The typical cone angle measures where the luminous intensity is 90% of the peak value of intensity. This typical cone varies with LED color due to different chip size and chip position tolerance.

Part Number	Typical on axis intensity (cd/lm) ⁽⁴⁾ with EDERTB-1LC6			
	Red LEDs ●	Green LEDs ●	Blue LEDs ●	RGB 3 in 1 ●
LL12ED-BG15L				
LL12ED-BG25L	2300	6480	1300	4200
LL12ED-BG45L				

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs datasheet for more details on flux binning and mechanical tolerance.

• EDERTB- KLC8

Part Number	Typical Cone Angle (degree) ⁽³⁾ with EDERTB-KLC8	
	White LEDs ○	Warm white LEDs ●
LL12ED-BG15L		
LL12ED-BG25L	26	27
LL12ED-BG45L		

The typical cone angle the full angle measured where the luminous intensity is 90% of the peak value of intensity. That typical cone varies with LED color due to different chip size and chip position tolerance.

Part Number	Typical on axis intensity (cd/lm) ⁽⁴⁾ with EDERTB-KLC8	
	White LEDs ○	Warm white LEDs ●
LL12ED-BG15L		
LL12ED-BG25L	6500	5800
LL12ED-BG45L		

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs datasheet for more detail on flux binning and mechanical tolerance.

Notes:


- (3) The typical divergence will be changed by different color, chip size and chip position tolerance.
The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.
- (4) The efficiency value listed above is the total value of the whole Tri-lens model, the value depends on the total flux of the LED used. Luminous intensity depends on the LEDs flux and its tolerances, for more details of LED flux, please check Edixeon® datasheet at www.edison-opto.com.tw.

Mechanical Specifications

• Usage and Maintenance :

1. If necessary, clean lenses with mild soap, water and soft cloth
2. Never use any commercial cleaning solvents on lenses, like alcohol
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.


1. Lens + Leds+MCPCB assembly instruction:

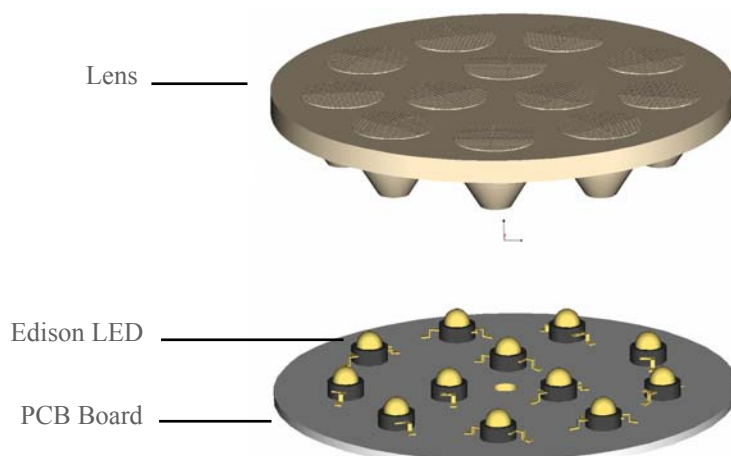


2. View assembly lens with MCPCB:




3. Multi-Color RGB Compatible MCPCB Dimensions:

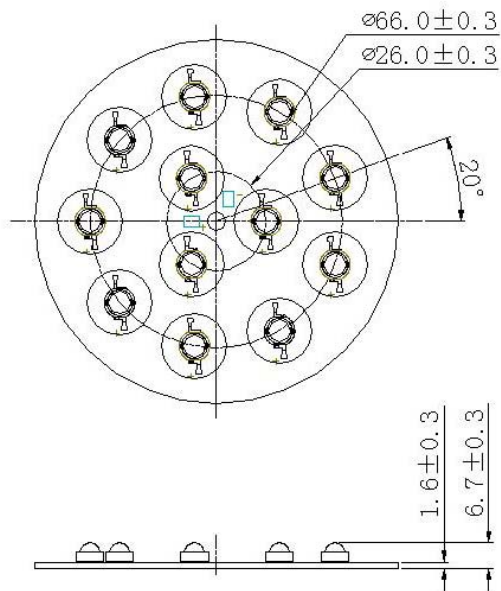

4. Single-Color Compatible MCPCB Dimensions:

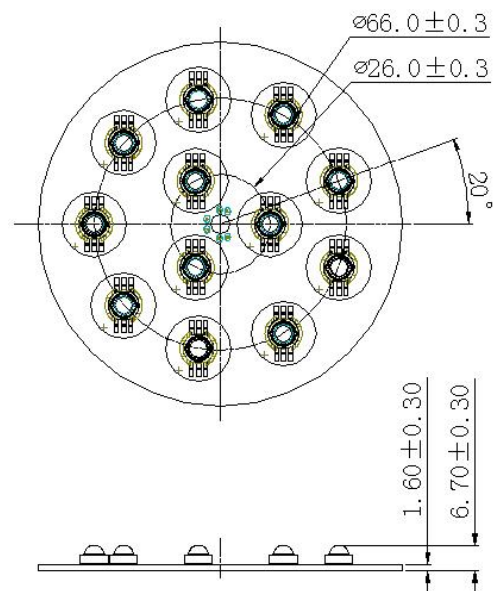

5. Lens assembly dimensions and Top Views :

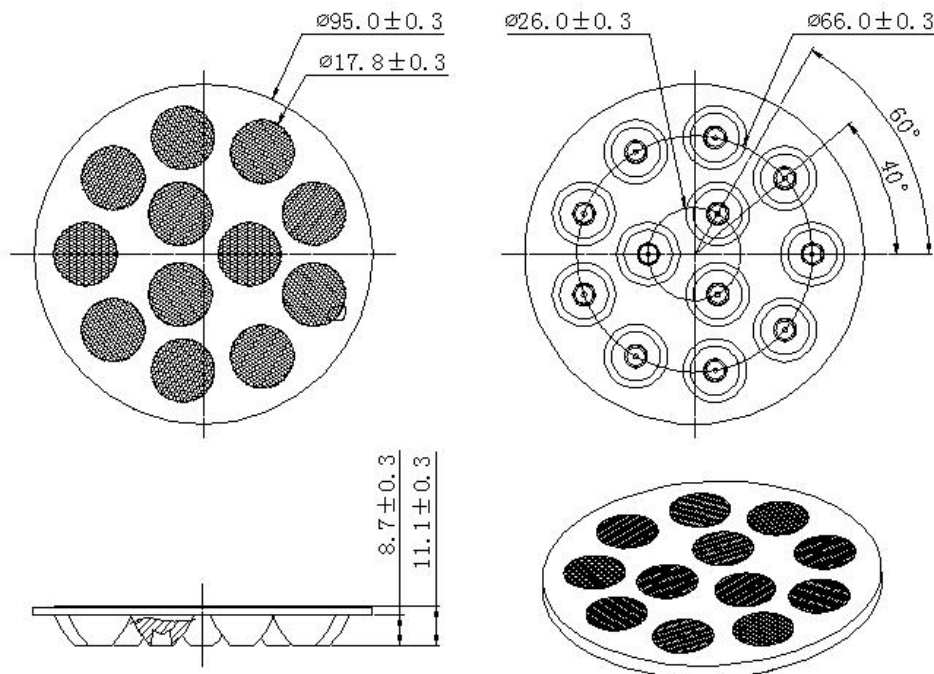

Notes:

- (1) All dimensions are in mm.
- (2) Drawing not to scale.
- (3) Collimator material is PMMA.
- (4) The surface of 15 degree lens is mirror surface , 25,45 degree lens are mesh point surface!

Illumination charts

*Edixeon® single white LED:EDEW-KLC8

LL12ED-BG15L

1. Beam Pattern

*Efficiency value is under modifying,not at present.

2. Angular Intensity Distribution


3. Shine on one degree diagram

LL12ED-BG25L


1. Beam Pattern



2. Angular Intensity Distribution

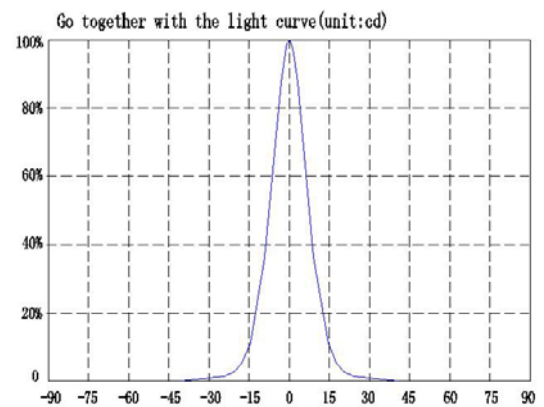

3. Shine on one degree diagram

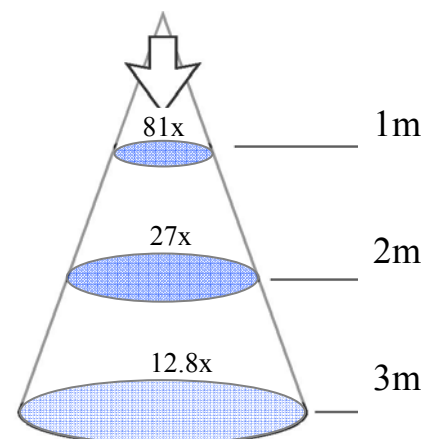



www.ledlink-optics.com

Illumination charts

*Edixeon® single white LED:EDEW-KLC8
LL12ED-BG45L

1. Beam Pattern


*Efficiency value is under modifying,not at present.

2. Angular Intensity Distribution

3. Shine on one degree diagram

Package

Item	Quantity	Total	Size (long * width * high)
Floar		9pcs	28*28cm
Inner box	19Floar/box	171pcs	29*29*22 cm
Outer box	2 inner box/outer box	342pcs	60*31*25.8cm

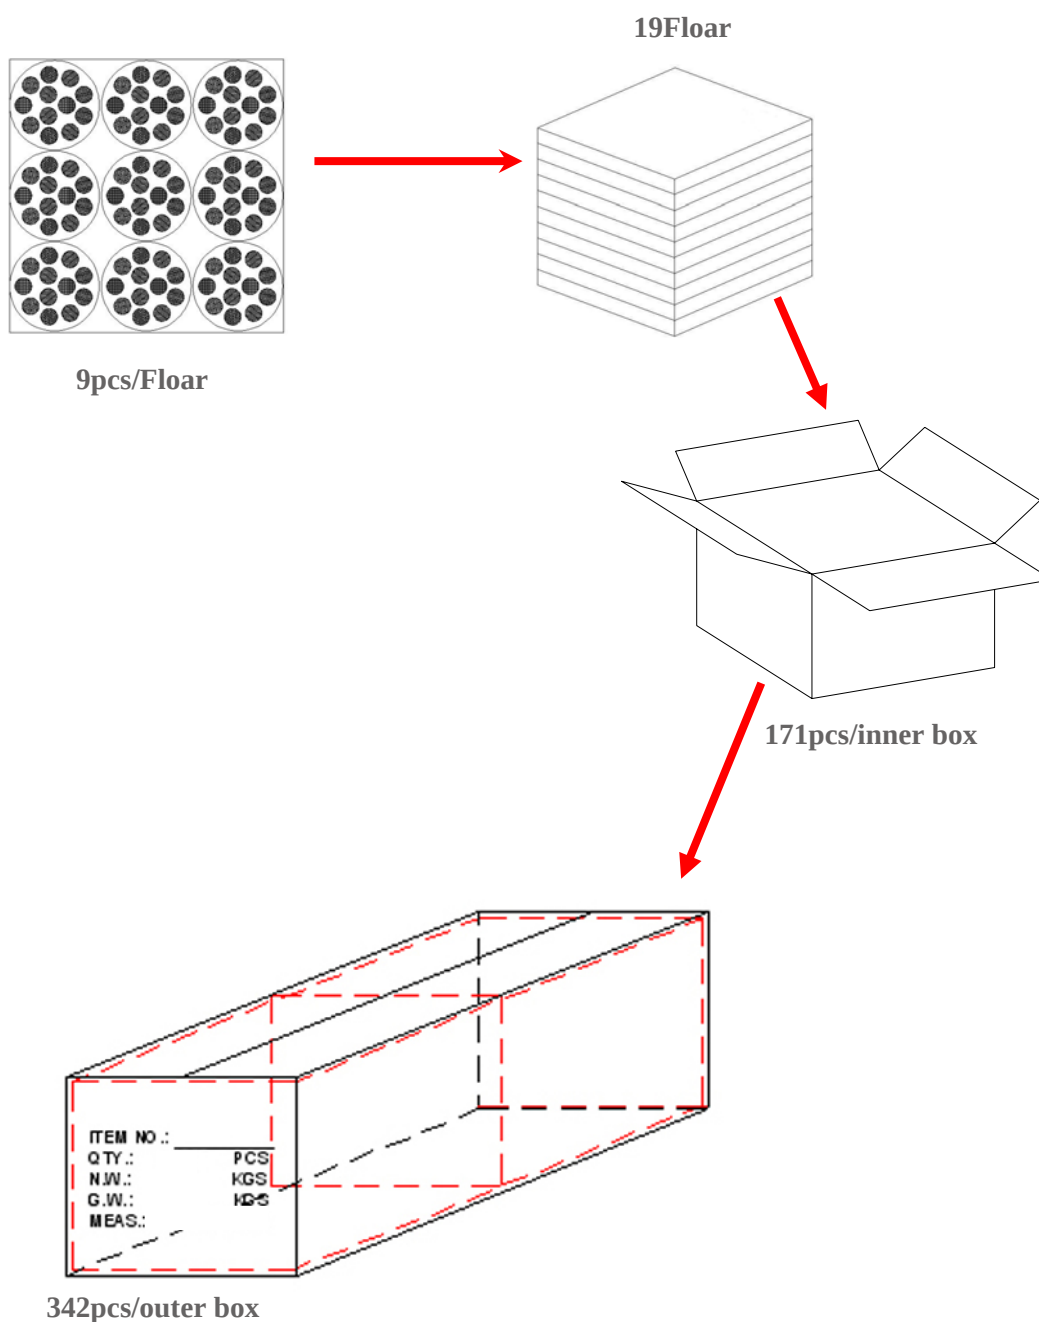

Product Nomenclature

