



HIGHBAY LUMINARES MODUL 100 - 200 WATT

LM-A029R1-HB

PRODUCT DESCRIPTION

Constant Current Led Board
 Current Range = 700 mA - 1400 mA
 Power Range = 100 - 200 watt
 Lumen = 15500 - 33000 lm
 Holes for screw fixing and or / biadhasive thermal pad optional
 Led Chip : On customer demand, Samsung, Cree, Seoul, Nichia etc
 solid conductor for input voltage
 Optional Accessories : lens, Drivers, Housing , 2 separate drivers can be used

Dimension 254 X 254 mm as shown
 Led Case 2835
 PCB 1,6 mm AL 35um
 LED QTY 384
 Operating Temp: -40 °C 105 °C
 Origin Turkey
 Warranty 2 Years
 compatible with multi lenses

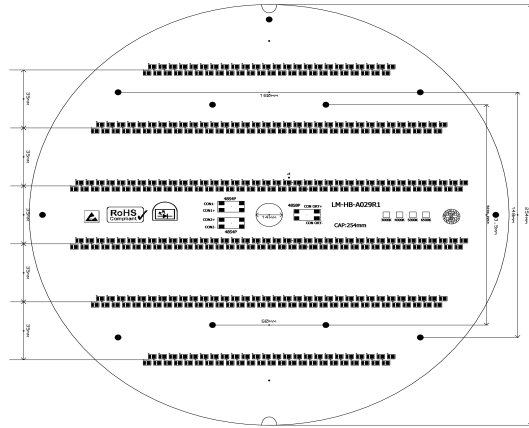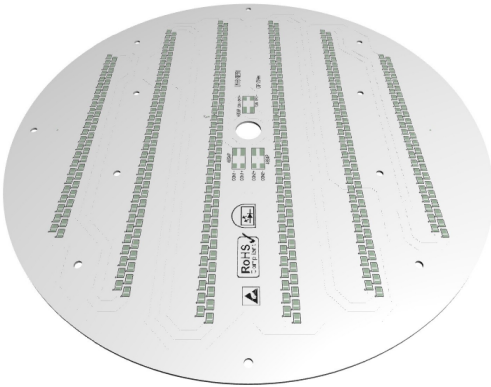

PRODUCT CODE	OPERATING MODE	COLOUR TEMP	LEDS	SERIAL	PARALEL	LUMIOUS FLUX	MIN FORWARD VOLTAGE	MAX VOLTAGE	MAX POWER CONSUMPTION	COLOUR RENDERING INDEX
LM-A029R1-HB	700 mA	3000K	384	48	8	15500	140 V	150 V	100 W	>80
		4000K				16000	140 V	150 V	100 W	>80
		6500K				16500	140 V	150 V	100 W	>80
LM-A029R1-HB	2X350 mA	3000K	384	48	8	15500	140 V	150 V	100 W	>80
		4000K				16000	140 V	150 V	100 W	>80
		6500K				16500	140 V	150 V	100 W	>80
LM-A029R1-HB	1050 mA	3000K	384	48	8	23200	140 V	150 V	150 W	>80
		4000K				24000	140 V	150 V	150 W	>80
		6500K				25000	140 V	150 V	150 W	>80
LM-A029R1-HB	1400 mA	3000K	384	48	8	28000	140 V	150 V	200 W	>80
		4000K				30000	140 V	150 V	200 W	>80
		6500K				33000	140 V	150 V	200 W	>80

