



- ❖ Enec Driver ,Flicker Free
- ❖ Aluminum Extrusion Body
- ❖ 5 years warranty
- ❖ Suitable for Different Size Industrial Project



Mechanical Specifications		Optical Specifications	
Body	Aluminum	Light Source	Osram MidPower Led
Ip Rating	IP54-(OPT.IP65)	Reflector	-
IK Rating Body	IK 08	Lens	-
Ral Code	RAL 9006	Diffuser	PC Opal
Cable Gland	PG7	CRI	>80
Cable	3x0,75 mm2	Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C	Photobiological Risk Group	RG1
Mounting Type	Cable Tray/Surface Mounted	Beam angle	120°
Electrical Specifications		Options	
Input Voltage	220-240 VAC	DALI	✓
Power Factor	>0.95	1-10 V	✓
System Lifetime	50000h	1 Hour Emergency Kit	✓
Class	I	3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C	Step Dim	
Standards	LM79/LM80	Another Mounting Type	


ERP Code	Ceiling Type	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910112	Surface	18	130	2340	3000K / 4000K / 6500K	33x49x600		12	6,60	Mounting Spring
1910113	Surface	25	130	3250	3000K / 4000K / 6500K	33x49x800		12	8,80	Mounting Spring
1910114	Surface	40	130	5200	3000K / 4000K / 6500K	33x49x1200		12	13,20	Mounting Spring
1910115	Surface	60	130	7800	3000K / 4000K / 6500K	33x49x1600		12	19,80	Mounting Spring
1910116	Surface	80	130	10400	3000K / 4000K / 6500K	33x49x2000		12	29,70	Mounting Spring





Technical Drawing

Teknik Çizim

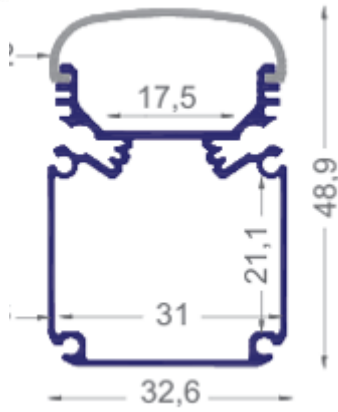

Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi

