

Square Highbay Luminaires



FORA HIGHBAY SERIES




- ❖ IP66 dust and Waterproof
- ❖ Adjustable mounting angle apparatus
- ❖ High Efficiency, 150 l/W,
- ❖ Tempered Glass
- ❖ 5 Years Warranty



Mechanical Specifications			Optical Specifications	
Body	Aluminum		Light Source	MidPower Led
Ip Raiting	IP65		Reflector	-
IK Rating Body	IK 08		Lens	PMMA
Ral Code	RAL 9006		Diffuser	Tempered Glass
Cable Gland	PG7		CRI	>80
Cable	3x0,75 mm2		Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C		Photobiological Risk Group	RG1
Mounting Type	Cable Tray/Surface Mounted		Beam angle	45°/60°/90°/120°/Asym
Electrical Specifications			Options	
Input Voltage	220-240 VAC		DALI	✓
Power Factor	>0.95		1-10 V	✓
System Lifetime	50000h		1 Hour Emergency Kit	✓
Class	I		3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C		Step Dim	
Standards	LM79/LM80		Another Mounting Type	Busbar

ERP Code	Ceiling Type	Power(W)	Efficiency(l m/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910129	Surface	100	150	15000	3000K / 4000K / 6500K	335x342x150		1	3,40	
1910130	Surface	150	150	22500	3000K / 4000K / 6500K	335x342x150		1	3,40	
1910131	Surface	200	150	30000	3000K / 4000K / 6500K	335x342x150		1	3,40	
1910132	Surface	240	150	36000	3000K / 4000K / 6500K	335x342x150		1	3,40	




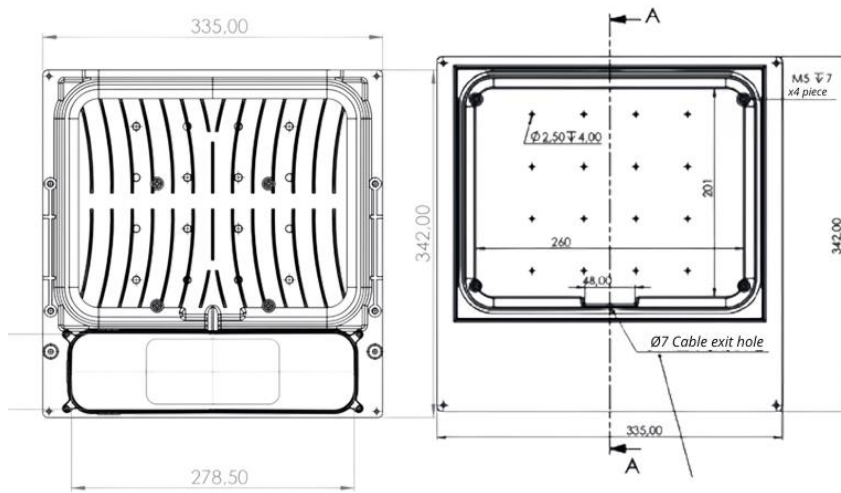


Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi


30° Lens




60° Lens



90° Lens



Asymmetric / Asimetrik



180.00 .0 270.0 90.0 η :1000 0 %

