




- ❖ IP66 dust and Waterproof
- ❖ Adjustable mounting angle apparatus
- ❖ Suitable for harsh environmental conditions
- ❖ Tempered Glass
- ❖ 5 Years Warranty


Mechanical Specifications		Optical Specifications	
Body	Aluminum	Light Source	MidPower Led/Power Led
Ip Rating	IP66	Reflector	-
IK Rating Body	IK 09	Lens	PMMA
Ral Code	RAL 9006	Diffuser	Tempered Glass
Cable Gland		CRI	>70
Cable	3x1,5mm ²	Colour Temperature	3000K / 4000K / 6500K
Fire Protection		Photobiological Risk Group	RG1
Mounting Type	Pole	Beam angle	Symetric/Asymetric
Electrical Specifications		Options	
Input Voltage	220-240 VAC	DALI	✓
Power Factor	>0.95	1-10 V	✓
System Lifetime	50000h	1 Hour Emergency Kit	✓
Class	I	3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C	Nema/Zaga Application	✓
Standards	LM79/LM80	Another Mounting Type	-

ERP Code	Console Angle	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Pole(Ø)	Pcs/Pack	Pack Weight(kg)	Accessory
1910164	0°-15°+15°	50	156	7800	3000K / 4000K / 6500K	535X210X108	40/50/60	1	3,00	
1910165	0°-15°+15°	80	156	12480	3000K / 4000K / 6500K	535X210X108	40/50/60	1	3,00	
1910166	0°-15°+15°	100	154	15400	3000K / 4000K / 6500K	600X265X108	40/50/60	1	4,00	
1910166	0°-15°+15°	125	154	19250	3000K / 4000K / 6500K	600X265X108	40/50/60	1	4,00	



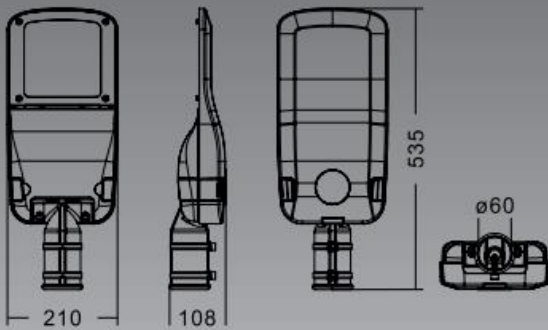

50W

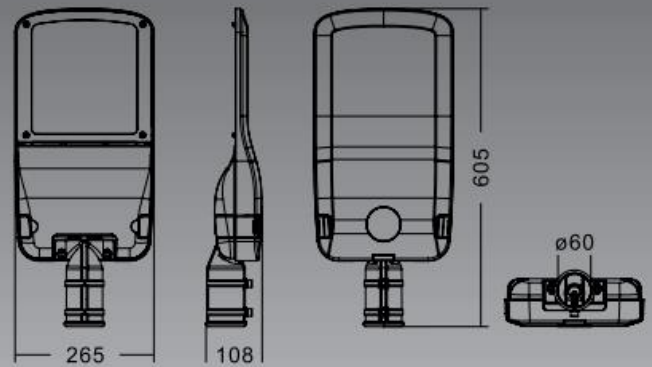

100W

Light Distribution Curve Işık Şiddeti Dağılım Eğrisi

