

Floodlight Luminaires



LUNA-28 FLOODLIGHT SERIES



- ❖ IP67 dust and Waterproof
- ❖ Adjustable mounting angle apparatus
- ❖ Suitable for harsh environmental conditions
- ❖ Tempered Glass
- ❖ 5 Years Warranty




Mechanical Specifications			Optical Specifications	
Body	Aluminum		Light Source	Power Led
Ip Raiting	IP67		Reflector	-
IK Rating Body	IK 08		Lens	-
Ral Code	RAL 7001		Diffuser	Tempered Glass
Cable Gland	PG7		CRI	>70
Cable	3x1 mm2		Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C		Photobiological Risk Group	RG1
Mounting Type	Pole/Ground		Beam angle	45°/60°/90°/120°/Asym
Electrical Specifications			Options	
Input Voltage	220-240 VAC		DALI	✓
Power Factor	>0.95		1-10 V	✓
System Lifetime	50000h		1 Hour Emergency Kit	✓
Class	I		3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C		Step Dim	-
Standards	LM79/LM80		Another Mounting Type	-

ERP Code	Ceiling Type	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910152	Surface	250	144	36000	3000K / 4000K / 6500K	292X379X150		1	7,40	
1910153	Surface	350	144	50400	3000K / 4000K / 6500K	292X570X190		1	11,20	






Technical Drawing Teknik Çizim

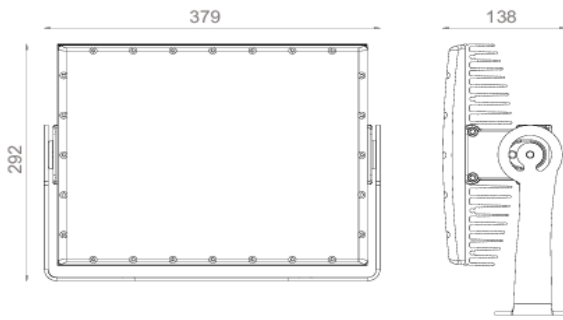


Light Distribution Curve Işık Şiddeti Dağılım Eğrisi


30° Lens




60° Lens



90° Lens



Asymmetric / Asimetrik



180.0 — 0.0 270.0 — 90.0 η : 1000 0 %

Cone Diagram Konik Diagram

