

Wallwasher Facade Lighting Luminaires



HARI-PRO WALLWASHER SERIES



- ❖ IP66 Dust and Waterproof
- ❖ 7 Different Color Options
- ❖ Aluminum injection covers
- ❖ Metal cable gland
- ❖ Enec Driver
- ❖ Custom size for Project



Mechanical Specifications			Optical Specifications	
Body	Aluminum		Light Source	MidPower Led
Ip Raiting	IP66		Reflector	-
IK Rating Body	IK 08		Lens	PC
Ral Code	RAL 7035		Diffuser	Pleksi
Cable Gland	PG7		CRI	>70
Cable	3x0,75 mm2		Colour Temperature	3000K / 4000K / Amber/Yeşil/RGB
Fire Protection	650°C		Photobiological Risk Group	RG1
Mounting Type	Surface Mounted		Beam angle	15°/30°/45°
Electrical Specifications			Options	
Input Voltage	220-240 VAC		DMX	✓
Power Factor	>0.95		1-10 V	-
System Lifetime	50000h		1 Hour Emergency Kit	-
Class	I		3 Hour Emergency Kit	-
Operating Temperature	-20°C / +45°C		Step Dim	-
Standards	LM79/LM80		Another Mounting Type	-


ERP Code	Ceiling Type	Power(W)	Efficiency(l m/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Length(cm)	Pcs/Pack	Pack Weight(kg)	Accessory
1910145	Surface	12	100	1200	3000K / 4000K / Amber/Yeşil/RGB	52X50X300	30-35 cm	1	0,40	Stainless Feet
1910146	Surface	18	100	1800	3000K / 4000K / Amber/Yeşil/RGB	52X50X600	60-65 cm	1	0,80	Stainless Feet
1910147	Surface	36	100	3600	3000K / 4000K / Amber/Yeşil/RGB	52X50X900	90-95 cm	1	1,20	Stainless Feet
1910148	Surface	48	100	4800	3000K / 4000K / Amber/Yeşil/RGB	52X50X1200	120-125 cm	1	1,60	Stainless Feet





Technical Drawing

Teknik Çizim

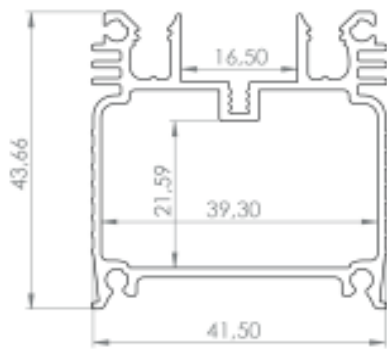

Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi

