



- ❖ IP66 dust and Waterproof
- ❖ Adjustable mounting angle apparatus
- ❖ Suitable for harsh environmental conditions
- ❖ Tempered Glass
- ❖ 5 Years Warranty




Mechanical Specifications		Optical Specifications	
Body	Aluminum	Light Source	MidPower Led
Ip Rating	IP66	Reflector	-
IK Rating Body	IK 08	Lens	-
Ral Code	RAL 7001	Diffuser	Tempered Glass
Cable Gland	PG7	CRI	>70
Cable	3x0,75 mm2	Colour Temperature	3000K / 4000K / 6500K
Fire Protection	650°C	Photobiological Risk Group	RG1
Mounting Type	Pole/Ground	Beam angle	45°/60°/90°/120°/Asym
Electrical Specifications		Options	
Input Voltage	220-240 VAC	DALI	✓
Power Factor	>0.95	1-10 V	✓
System Lifetime	50000h	1 Hour Emergency Kit	✓
Class	I	3 Hour Emergency Kit	✓
Operating Temperature	-20°C / +45°C	Step Dim	-
Standards	LM79/LM80	Another Mounting Type	-

ERP Code	Ceiling Type	Power(W)	Efficiency(l m/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910146	Surface	80	140	11200	3000K / 4000K / 6500K	335X400X150		1	3,20	
1910147	Surface	100	140	14000	3000K / 4000K / 6500K	335X400X150		1	3,20	
1910148	Surface	120	140	16800	3000K / 4000K / 6500K	335X400X150		1	3,20	
1910149	Surface	150	140	21000	3000K / 4000K / 6500K	335X400X150		1	3,20	
1910150	Surface	200	140	28000	3000K / 4000K / 6500K	335X400X150		1	3,20	
1910151	Surface	240	140	33600	3000K / 4000K / 6500K	335X400X150		1	3,20	








Technical Drawing Teknik Çizim

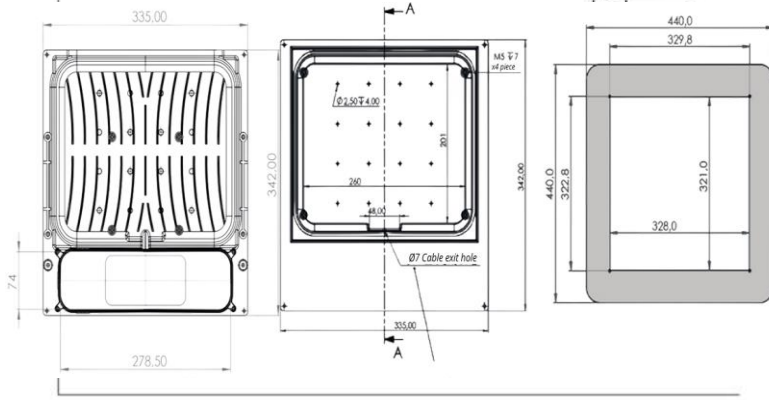

Light Distribution Curve Işık Şiddeti Dağılım Eğrisi

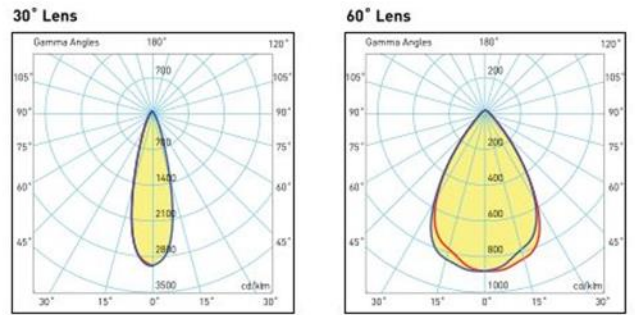

Cone Diagram Konik Diagram

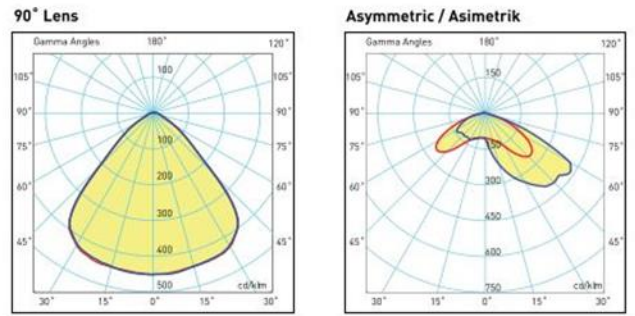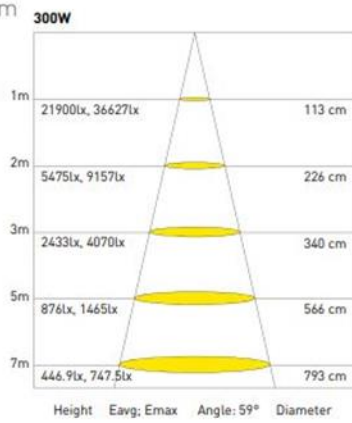

180.0 — 0.0 270.0 — 90.0 η : 1000 0 %

