




- ❖ IP66 dust and Waterproof
- ❖ Suitable for harsh environmental conditions
- ❖ Tempered Glass
- ❖ 5 Years Warranty




| Mechanical Specifications |                  |          |                   |                   |                       | Optical Specifications     |                     |          |                 |           |
|---------------------------|------------------|----------|-------------------|-------------------|-----------------------|----------------------------|---------------------|----------|-----------------|-----------|
| Body                      | Aluminum         |          |                   |                   |                       | Light Source               | MidPower Led        |          |                 |           |
| Ip Raiting                | IP66             |          |                   |                   |                       | Reflector                  | -                   |          |                 |           |
| IK Rating Body            | IK 08            |          |                   |                   |                       | Lens                       | PMMA                |          |                 |           |
| Ral Code                  | RAL 9016         |          |                   |                   |                       | Diffuser                   | Tempered Glass      |          |                 |           |
| Cable Gland               | PG7              |          |                   |                   |                       | CRI                        | >80                 |          |                 |           |
| Cable                     | 3x0,75 mm2       |          |                   |                   |                       | Colour Temperature         | 4000K / 5000K/6500K |          |                 |           |
| Fire Protection           | 650°C            |          |                   |                   |                       | Photobiological Risk Group | RG1                 |          |                 |           |
| Mounting Type             | Recessed Mounted |          |                   |                   |                       | Beam angle                 | 60°/90°/120°/       |          |                 |           |
| Electrical Specifications |                  |          |                   |                   |                       | Options                    |                     |          |                 |           |
| Input Voltage             | 220-240 VAC      |          |                   |                   |                       | DALI                       | ✓                   |          |                 |           |
| Power Factor              | >0.95            |          |                   |                   |                       | 1-10 V                     | ✓                   |          |                 |           |
| System Lifetime           | 50000h           |          |                   |                   |                       | 1 Hour Emergency Kit       |                     |          |                 |           |
| Class                     | II               |          |                   |                   |                       | 3 Hour Emergency Kit       |                     |          |                 |           |
| Operating Temperature     | (-20°C / +50°C)  |          |                   |                   |                       | Step Dim                   |                     |          |                 |           |
| Standards                 | LM79/LM80        |          |                   |                   | Another Mounting Type |                            |                     |          |                 |           |
|                           |                  |          |                   |                   |                       |                            |                     |          |                 |           |
| ERP Code                  | Ceiling Type     | Power(W) | Efficiency(l m/W) | Luminous Flux(lm) | Colour Temp.          | Dimensions (mm)            | Cut Size            | Pcs/Pack | Pack Weight(kg) | Accessory |
| 1910174                   | Canopy           | 80W      | 140               | 11200             | 4000K / 5000K/6500K   | 410x400x75                 | 350x350             | 1        | 4,8             |           |
| 1910175                   | Canopy           | 100W     | 140               | 14000             | 4000K / 5000K/6500K   | 410x400x75                 | 350x350             | 1        | 4,8             |           |
| 1910176                   | Canopy           | 120W     | 140               | 16800             | 4000K / 5000K/6500K   | 410x400x75                 | 350x350             | 1        | 4,80            |           |
| 1910177                   | Canopy           | 150W     | 135               | 20250             | 4000K / 5000K/6500K   | 410x400x75                 | 350x350             | 1        | 4,80            |           |

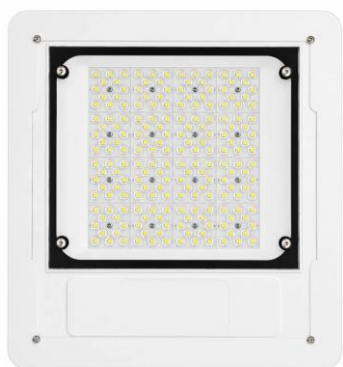



## Technical Drawing

Teknik Çizim

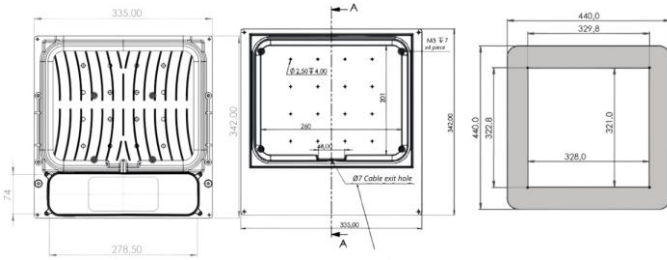

## Light Distribution Curve

Işık Şiddeti Dağılım Eğrisi

