

SENA CANOPY SERIES



- ❖ IP66 dust and Waterproof
- ❖ Suitable for harsh environmental conditions
- ❖ Tempered Glass
- ❖ 5 Years Warranty




Mechanical Specifications				Optical Specifications						
Body	Aluminum			Light Source	MidPower Led					
Ip Rating	IP66			Reflector	-					
IK Rating Body	IK 08			Lens	PMMA					
Ral Code	RAL 9016			Diffuser	Tempered Glass					
Cable Gland	PG7			CRI	>80					
Cable	3x0,75 mm2			Colour Temperature	4000K / 5000K/6500K					
Fire Protection	650°C			Photobiological Risk Group	RG1					
Mounting Type	Recessed Mounted			Beam angle	60°/90°/120°/					
Electrical Specifications				Options						
Input Voltage	220-240 VAC			DALI	✓					
Power Factor	>0.95			1-10 V	✓					
System Lifetime	50000h			1 Hour Emergency Kit						
Class	II			3 Hour Emergency Kit						
Operating Temperature	(-20°C / +50°C)			Step Dim						
Standards	LM79/LM80			Another Mounting Type						
ERP Code	Ceiling Type	Power(W)	Efficiency(lm/W)	Luminous Flux(lm)	Colour Temp.	Dimensions (mm)	Cut Size	Pcs/Pack	Pack Weight(kg)	Accessory
1910174	Canopy	80W	140	11200	4000K / 5000K/6500K	410x400x75	350x350	1	4,8	
1910175	Canopy	100W	140	14000	4000K / 5000K/6500K	410x400x75	350x350	1	4,8	
1910176	Canopy	120W	140	16800	4000K / 5000K/6500K	410x400x75	350x350	1	4,80	
1910177	Canopy	150W	135	20250	4000K / 5000K/6500K	410x400x75	350x350	1	4,80	





### Technical Drawing Teknik Çizim

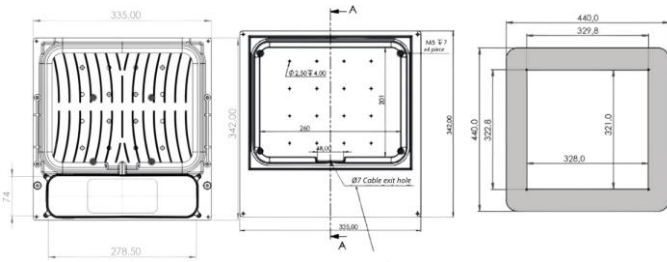

### Light Distribution Curve Işık Şiddeti Dağılım Eğrisi

