

PRODUCT DESCRIPTION

Constant Current Led Board

Current Range = 1050 mA - 1750 mA

Power Range = 10 - 18 watt

Lumen = 980 - 3200 lm

Holes for screw fixing and or / biadhasive thermal pad optional

Led Chip : On customer demand, Samsung, Cree, Seoul, Nichia etc

solid conductor for input voltage

Optional Accessories : lens, Drivers, Housing

compatible with 12X12 multi lenses

Dimension

60 X 590 mm as shown

Led Case

2835

PCB

1,0 mm AL 35um

LED QTY

160

Operating Temp:


-40 °C 105 °C

Origin

Turkey

Warranty

2 years

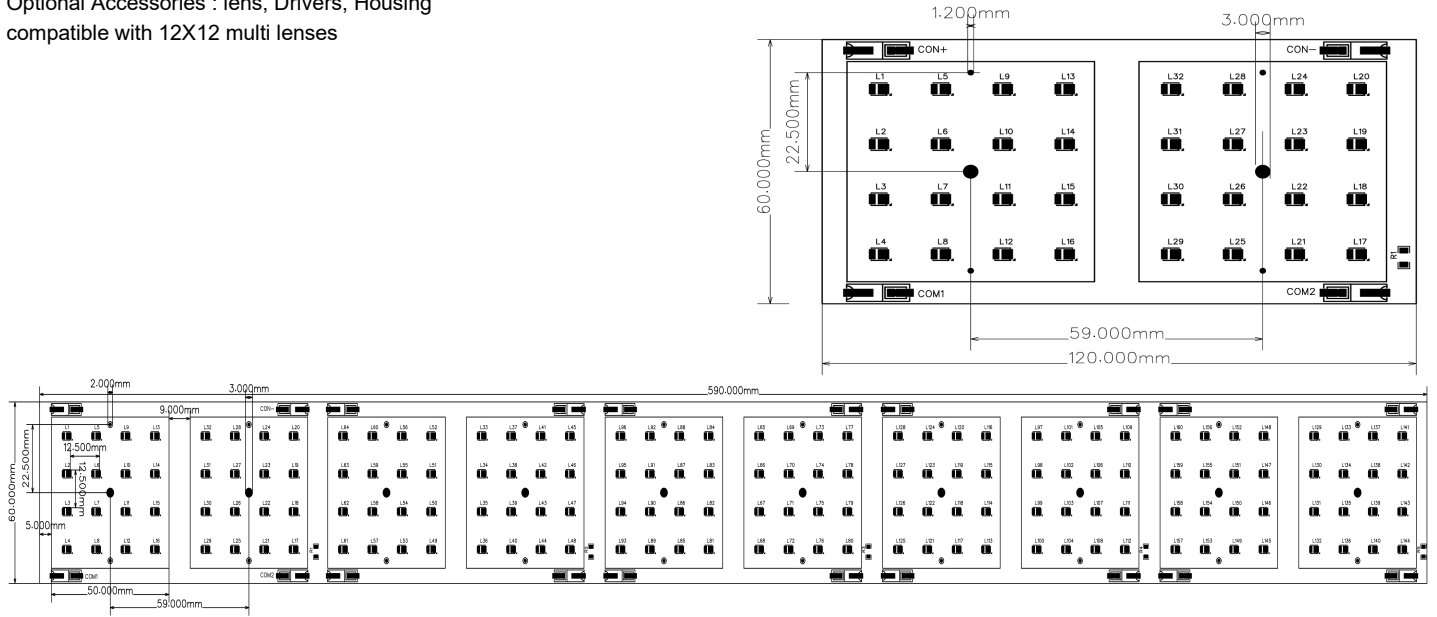

PRODUCT CODE	OPERATING MODE	COLOUR TEMP	LEDS	SERIAL	PARALEL	LUMIOUS FLUX	MIN FORWARD VOLTAGE	MAX VOLTAGE	MAX POWER CONSUMPTION	COLOUR RENDERING INDEX
LM-A024-ETN	350 mA	3000K	160	40	4	6000	120 V	130 V	40 W	>90
		4000K				6300	120 V	130 V	40 W	>90
		6500K				6600	120 V	130 V	40 W	>90
LM-A024-ETN	500 mA	3000K	160	40	4	8700	120 V	130 V	60 W	>90
		4000K				9200	120 V	130 V	60 W	>90
		6500K				10000	120 V	130 V	60 W	>90

