
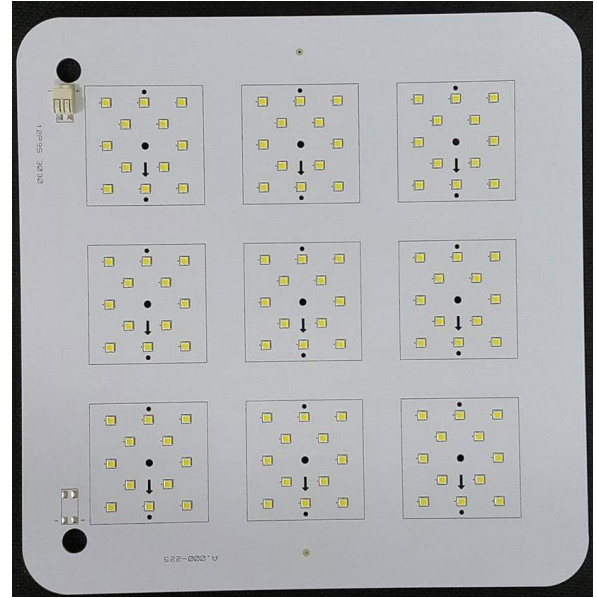


CANOPY 75 - 120 WATT

LM-A225-CAN

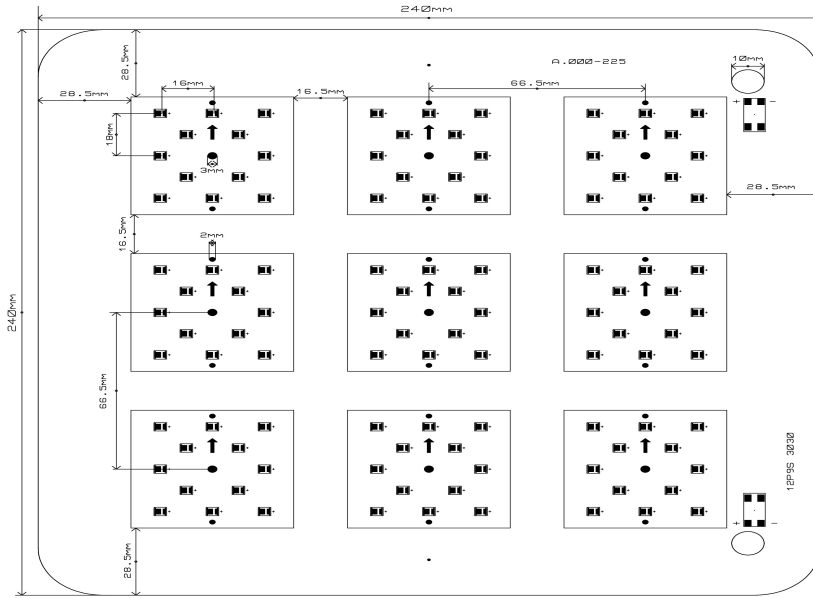

Constant Current Led Board
 Current Range = 1400 mA - 1750 Ma
 Power Range = 75 - 100 watt
 Lumen = 15500 - 22500 lm
 Holes for screw fixing and or / biadhasive thermal pad optional
 Led Chip : On customer demand, Samsung, Cree, Seoul, Nicha etc
 solid conductor for input voltage
 Optional Accessories : lens, Drivers, Housing
 compatible with 12X16 multi lenses
 Origin
 Warranty

Dimension 240 X 240 mm as shown
 Led Case 3030 (6 VOLT)
 PCB 1,6 mm AL 35um
 LED QTY 108
 Operating Temp: -40 °C 105 °C

PRODUCT CODE	OPERATING MODE	COLOUR TEMP	LEDS	SERIAL	PARALEL	LUMIOUS FLUX	MIN FORWARD VOLTAGE	MAX VOLTAGE	MAX POWER CONSUMPTION	COLOUR RENDERING INDEX
LM-CAN-A225	1400 mA	3000K	108	9	12	15500	54V	60V	75 W	>70
		4000K				16500	54V	60V	75 W	>70
		6500K				18000	54V	60V	75 W	>70
LM-CAN-A225	1750 mA	3000K	108	9	12	19500	54V	60V	100 W	>70
		4000K				21000	54V	60V	100 W	>70
		6500K				22500	54V	60V	100 W	>70

